




2025

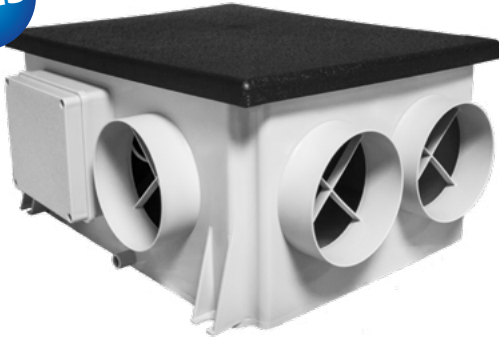

## SINGLE FLOW EXTRACT VENTILATION UNIT

### APPLICATION

Whole-house mechanical extract unit, suitable for wall, ceiling and floor installation, for horizontal or vertical mounting. Designed to be connected to self-adjusting extracts.

### SPECIFICATION

**Fan casing** made from a single-piece body in polypropylene (PP), color RAL 7035 to ensure air-tightness.

**Top cover** shall be made from strong durable ABS plastic.

**EC external rotor motors** fitted as standard for energy saving. Provided with integral thermal protection, mounted on sealed for life ball bearings, and anti-vibration supports.

**Forward curved centrifugal impeller** dynamically balanced and directly driven by the motor to provide a smooth airflow through the unit.

**Multiple extract points** to simultaneously extract condensation from wet rooms and stale air from kitchens and utility rooms.

Ø125mm **outlet** to exhaust air to the outside and 4xØ125mm **inlets** to draw stale air out from inside.

### FEATURES & BENEFITS

**Ease of installation:** light-weighted structure with wall fixing eyelets and anti-vibration mounts.

**Compact profile** to fit in narrow spaces like false-ceiling or loft spaces.

**Top cover** easily removable for inspection and maintenance.

**Acoustic self-extinguishing foam lining** for sound attenuation.

**Double insulated:** no earth connection is required.

**Tested to the latest standards:** units are tested in the TÜV Rheinland recognised laboratory at Aerauliqa, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon. Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

### VERSIONS


#### QPMEV 125HY

- One or two speed operation.
- Variable speed with remote control CTRL-M (accessory on request).
- Variable speed with remote home automation system (BMS) or ballast potentiometer.
- 3 speeds with remote selector SEL-3V (accessory on request).
- The minimum and maximum speeds are adjustable.
- The unit is equipped with an integral humidity sensor: when the humidity threshold is reached, the fan speed is increased by 15%.

#### QPMEV 125HX

- Adjustable three speed operation.
- The units operates at minimum speed, which automatically increases to medium speed either when the set humidity threshold is exceeded or through the smart humidity control that adjusts the unit behavior to the user's habits, ensuring maximum acoustic comfort.
- Medium or maximum speed can be activated via an external control such as an ON/OFF switch, ambient sensor SEN-HY or SEN-PIR, light switch, or via a momentary switch.

## Example of a complete ventilation system

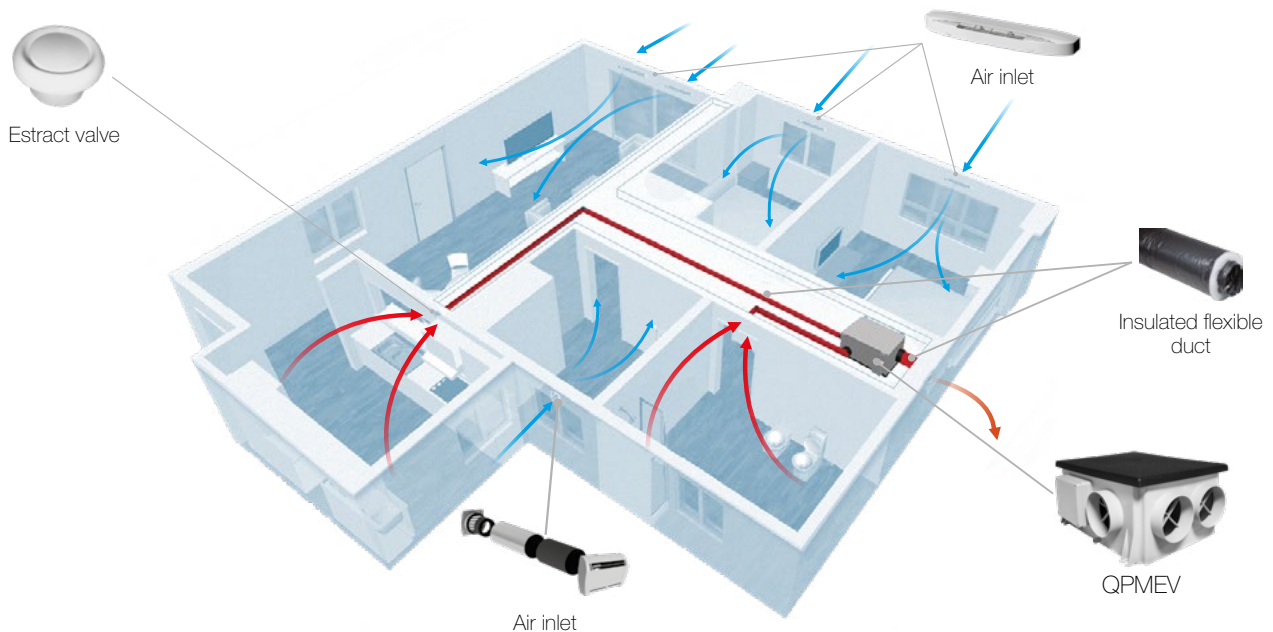

**How it works:** a continuous running centralised single flow ventilation unit (QPMEV) extracts the stale air from different rooms contemporaneously, with top acoustic comfort.




To be used in combination with self-adjusting air inlet.

Thanks to the easy-to-fit air distribution system each single ambient can be properly ventilate: the boost function enables rapid extract of increased moisture or pollutant levels. It also provides discrete installation and very quite operation.

**Energy saving:** the EC brushless motors significantly reduce the electricity consumption.

**Indoor Air Quality:** a correctly specified mechanical ventilation system can ensure the quality of the indoor air is constantly maintained for the health and well-being of the occupants as well as of the building.

## Dimensions (mm) and Weight (kg)

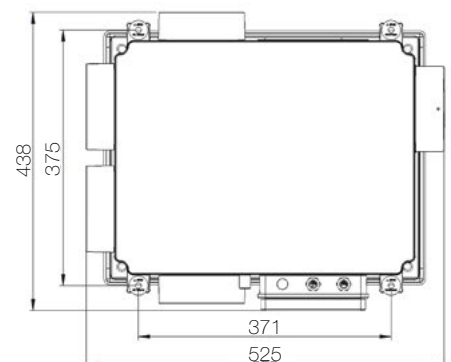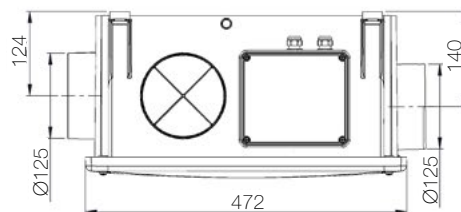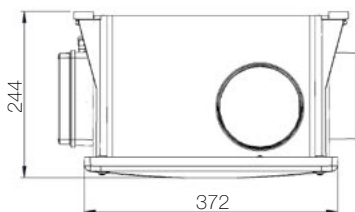


Model	QPMEV 125
Weight	5

# QPMEV 125

## Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014

a)	Mark	-	AERAULIQA	
b)	Model	-	QPMEV 125HY - QPMEV 125HX	
c)	SEC class	-	B	D
c1)	SEC warm climates	kWh/m <sup>2</sup> .a	-11,9	-8,6
c2)	SEC average climates	kWh/m <sup>2</sup> .a	-27,4	-20,6
c3)	SEC cold climates	kWh/m <sup>2</sup> .a	-54,5	-41,6
	Energy label	-	Yes	
d)	Unit typology	-	Residential - unidirectional	
e)	Type of drive	-	Multiple speed drive	
f)	Type of Heat Recovery System	-	Absent	
g)	Thermal efficiency of heat recovery	%	N/A	
h)	Maximum flow rate @ 100 Pa	m <sup>3</sup> /h	239	
i)	Electric power input (maximum flow rate)	W	28	
j)	Sound power level (L <sub>WA</sub> )	dBA	42	
k)	Reference flow rate	m <sup>3</sup> /h	167	
l)	Reference pressure difference	Pa	50	
m)	Specific power input (SPI)	W/m <sup>3</sup> /h	0,054	
n1)	Control factor	-	0,65	0,85
n2)	Control typology	-	Local demand control	Central demand control
o1)	Maximum internal leakage rate	%	N/A	
o2)	Maximum external leakage rate	%	1,8	
p1)	Internal mixing rate	%	N/A	
p2)	External mixing rate	%	N/A	
q)	Visual filter warning	-	N/A	
r)	Instructions to install regulated grilles	-	see installation manual	
s)	Internet address for pre/disassembly instructions	-	www.aerauliqua.com	
t)	Airflow sensitivity to pressure variations	%	N/A	
u)	Indoor/outdoor air tightness	m <sup>3</sup> /h	N/A	
v1)	AEC - Annual electricity consumption - warm climates	kWh	0,4	0,5
v2)	AEC - Annual electricity consumption - average climates	kWh	0,4	0,5
v3)	AEC - Annual electricity consumption - cold climates	kWh	0,4	0,5
w1)	AHS - Annual heating saved - warm climates	kWh	12,8	9,9
w2)	AHS - Annual heating saved - average climates	kWh	28,3	21,9
w3)	AHS - Annual heating saved - cold climates	kWh	55,4	42,9
	Sound pressure @ 3m <sup>(1)</sup>	dB(A)	14	
	Ambient temperature max	°C	+40	
	Degree of protection	-	X2	
	Marking	-	CE	

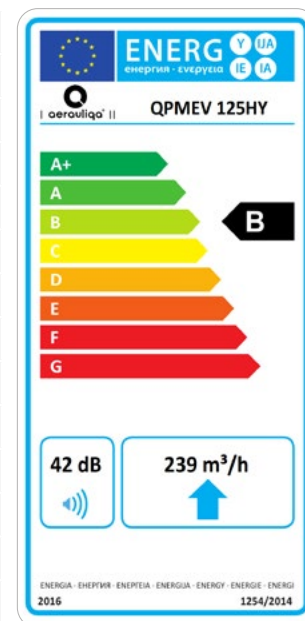


- 230V ~ 50/60Hz.

- air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2Kg/m<sup>3</sup>.

- data measured in the TÜV Rheinland recognised laboratory in Aerauliqua.

(1) sound pressure level @ 3m in free field, breakout, speed 40%, for comparative purposes only.

## Performance curve

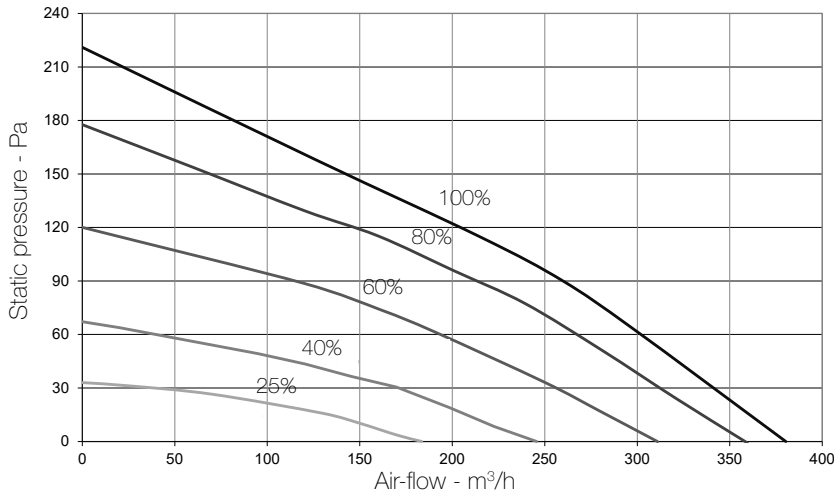

Speed %	W max	m³/h max
25	5	184
30	6	206
40	9	246
60	17	311
80	27	360
90	31	372
100	35	380

## Sound level

		Lw dB - SOUND POWER OCTAVE BAND									Lp dB(A)
		63	125	250	500	1 K	2 K	4 K	8K	Tot	@3m
Speed 100%											
Intake		53	54	57	48	46	41	34	29	60	32
Extract		57	54	53	54	53	51	47	4	62	37
Breakout		52	59	51	48	46	40	32	27	61	30
Speed 80%											
Intake		49	48	49	44	41	35	28	24	54	26
Extract		47	47	48	50	47	44	39	34	55	31
Breakout		48	45	44	43	40	33	25	22	52	24
Speed 60%											
Intake		43	40	44	41	33	27	24	22	48	21
Extract		43	41	46	44	40	36	30	26	51	25
Breakout		39	39	44	43	33	27	23	19	48	22
Speed 40%											
Intake		38	36	44	33	26	21	20	19	46	16
Extract		38	38	40	36	2	30	23	21	45	18
Breakout		36	36	40	32	26	21	19	17	43	14

Lp dB(A) @3m for comparative purposes only